

AMCO

MANUFACTURING, INC.



Maintenance-Free
Gang Bearings

F17 DOUBLE OFFSET TANDEM DISC HARROW

For dependable seedbed preparation, you can rely on AMCO's F17 Double Offset Tandem Disc Harrow. Built AMCO tough, the F17 opens and breaks up the surface, smoothing the soil so your ideal seedbed is ready for planting.

Since each farming operation is different, AMCO's Double Offset Tandem Disc Harrow is available in a wide variety of sizes. Weighing between 296 and 337 pounds per cutting foot, the disc harrows are available in 9'3", 10'6", 12'0", 13'6", 15'0", and 16'6" models for use with tractors ranging from 68 to 176 engine horsepower.

High-quality features are essential in today's farming operation, and the F17 won't disappoint. Features include:

- › Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
- › Wear guards to protect bearing housing and zerk guards to protect grease fitting
- › 1½" square, high-carbon, cold-rolled steel axles
- › 70" tongue jack with reversible clevis
- › ¾" x 6½" x 8", high-carbon steel, replaceable, adjustable scraper blades mounted on bars of 2½" x 2½" square tubing. The scrapers are attached to the 2½" x ½" thick arms with heavy-duty u-bolts
- › Standard 22" x ¼" plain blades on 9" spacing
- › Standard gang bolt wrench and a 4" x 8" (3,000 PSI) hydraulic cylinder with hoses to tractor


Dealing with unexpected or unpredictable terrain? Try the optional Shock Absorber Bearing Riser, which allows the gang on the harrow to move upward and back to relieve shock when the disc blades encounter an obstacle in the ground.

Other customization options include 15" x 10" wheels in place of 15" x 8" wheels, dual wheels in place of single wheels, cutout blades in place of the standard plain blades, and scrapers for the rear feathering blades. More blade configurations are available as well—call to discuss your options.

FEATURES



PRODUCT PERFORMANCE GUARANTEE—Repair, Replace, or Refund: AMCO Guarantees Performance. The best tillage tools deserve the best guarantee. The AMCO guarantee is simple. If, during the first 30 days, your AMCO equipment doesn't perform as promised, and if we don't make it perform in a reasonable amount of time, we'll repair it, replace it, or buy it back.

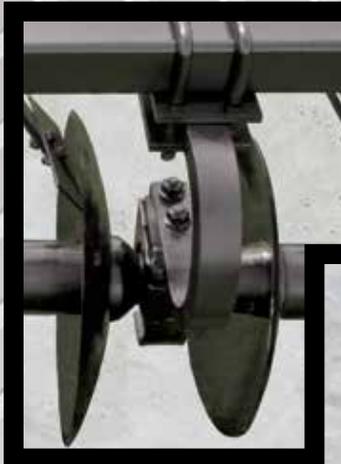

Left: For unexpected or unpredictable terrain, try the optional Shock Absorber Bearing Riser. The gang will move upward and back to relieve shock when the blades strike an obstacle.



Left: Standard heavy-duty scrapers with replaceable high-carbon blades free blades of soil buildup.



Below: Transport lockout pin ensures safe road travel.



Above: Diminishing blades on the rear gang and feathering blades provide a smooth, even cut.

Above: Front to rear leveling spring allows easy adjustment in the field. The standard tongue jack and gang bolt wrench both fit in place on the tongue during operation. A 4" x 8" (3,000 PSI) hydraulic cylinder with hoses to tractor is also standard equipment.



MANUFACTURING, INC.

800 S. Industrial Parkway
P. O. Box 1107
Yazoo City, MS 39194

Toll free: 800-748-9022
662-746-4464
Fax: 662-746-6825

Web: www.amcomfg.com
Facebook: www.facebook.com/AMCOManufacturingInc
Email: sales@amcomfg.com

F17 Double Offset Tandem Disc Harrow models

Model	Cutting Width	No. of Discs	No. of Bearings	Approx. Engine HP Required	Approx. Weight lbs.*
F17-2622	9'3"	26	8	68-101	3,414
F17-3022	10'6"	30	8	81-108	3,698
F17-3422	12'0"	34	8	95-122	3,982
F17-3822**	13'6"	38	12	108-135	4,816
F17-4222**	15'0"	42	12	122-155	5,130
F17-4622**	16'6"	46	12	142-176	5,644

*To calculate weight/blade, divide the approximate weight of the model by the number of disc blades.
**Includes 2 outrigger bars and clamps. Specifications for all models subject to change without notice.



**TOUGH
TILLAGE
TOOLS**