




Selling Points: AMCO Levee Plow



-
- (1) A 3" x 8" hydraulic cylinder on each gang to adjust gang tilt from tractor cab (LF6 and LJ6 only)
 - (2) AMCO-exclusive Follow-the-Levee feature that allows gangs to shift independently from the tractor to follow sharply curving levee lines.
 - (3) A hitch designed to accommodate category II and III hitches for quick couplers and conventional 3-point hitches.
 - (4) Adjustable, telescoping frames to accommodate narrow or wide-based levees.
 - (5) A main frame 7" x 4" x 3/8" toolbar and 1 1/2" square, high-carbon, cold-rolled steel axles.
 - (6) 2 1/2" x 2 1/2" square tubing scraper rail.
 - (7) Standard 24" x 1/4" blades with a 10" backup blade on the end blade of each gang.
 - (8) 3/16" x 6 1/2" x 8" High Carbon Steel, Replaceable & Adjustable Scraper Blades. Available in 8-blade, 10-blade, and 12-blade models. (Shown above is an 8-blade model)
 - (9) Welded steel spacer spools to prevent breakage upon impact with solid obstacles such as rocks.
 - (10) AMCO Protect-O-Shield bearings feature an exclusive protective shield to protect its triple seals. Our bearing prevents blown seals and prevents wrap damage. Additional 2 year warranty.
- Gang angles that are easily adjustable with pins from 18 to 28 degrees.

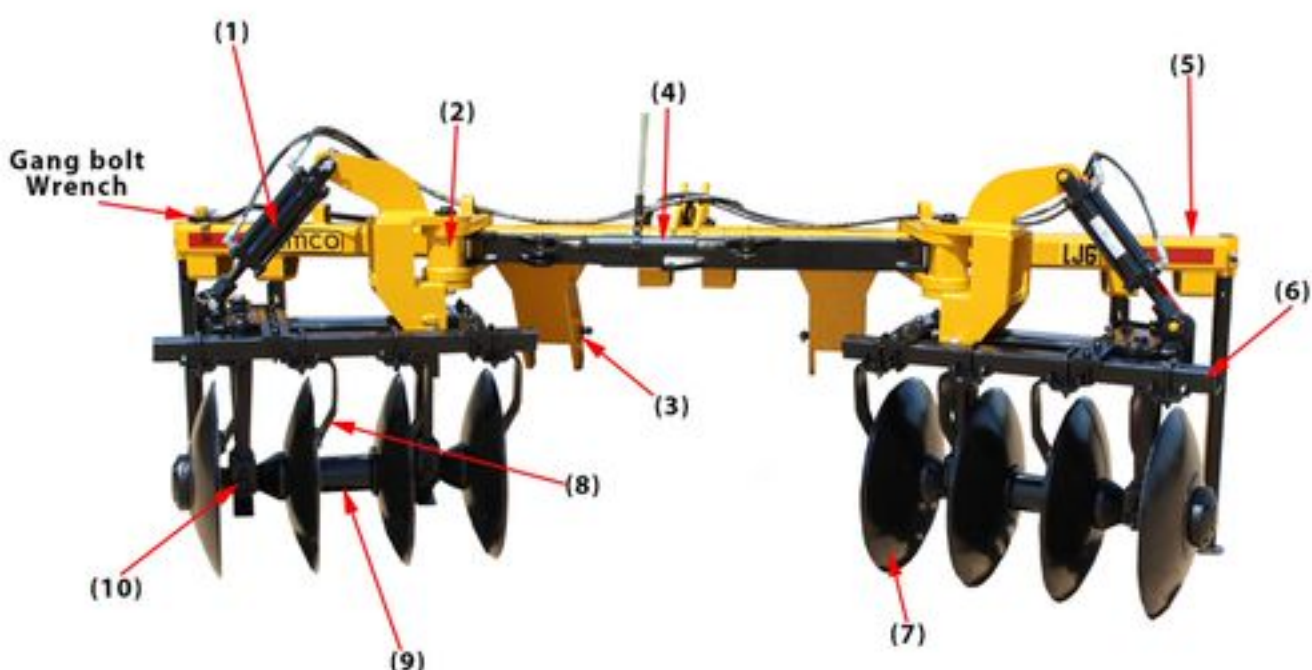

Product Performance Guarantee: If during the first 30 days, your AMCO equipment doesn't perform as promised, and if we don't make it perform in a reasonable amount of time, we'll repair it, replace it, or buy it back!