

# WORKHORSE F15B DOUBLE OFFSET FLEXWING TANDEM DISC HARROW

## A compact folding disc that packs a punch.

AMCO's F15B features folding wings that flex and follow the contour of the field, effortlessly smoothing the soil to create the perfect, berm-free seedbed.

This compact folding disc harrow model packs just as much punch as AMCO's larger disc harrows, giving farmers the benefits of a smaller harrow without sacrificing performance and results.

*See reverse for additional disc harrow information.*



**Maintenance-Free  
Gang Bearings**



MANUFACTURING, INC.



## The F15B Disc Harrow Features

- › Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
- › Features 1½" square gang bolt
- › Features 9" blade spacing with welded steel spacer spools
- › At 122 to 140 pounds per blade, the F15B offers excellent soil penetration
- › ¾" x 6½" x 8", high-carbon steel, replaceable, adjustable scraper blades mounted on bars of 2½" x 2½" square tubing. The scrapers are attached to the 2½" x ½" thick arms with heavy-duty U-bolts
- › Preset gang angle at 17 degrees. No adjustment necessary
- › Overlapping front disc blades give 100% tillage across the unit




MANUFACTURING, INC.



The F15B features overlapping front discs that cut through soil and residue. The flow of soil off the staggered rear disc gangs fills in the center of the furrow.

## More AMCO Disc Harrow Features

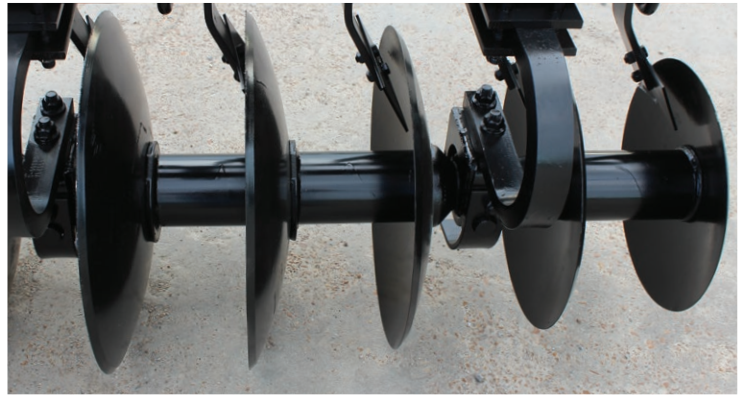

Standard 22" x 1/4" blades (tapered blades on rear gangs).



Turnbuckle rod allows adjustments to ensure level cutting. Adapts to various tire sizes and provides level transport.



Shock Absorber Bearing Risers (optional).



4" x 24" wing-fold cylinders.



90" tongue features jack and adjustable clevis.

## TOUGH TILLAGE TOOLS

SINCE  
1947

Toll free: 800-748-9022

Web: [www.amcomfg.com](http://www.amcomfg.com)

Local: 662-746-4464

Facebook: [www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)

Fax: 662-746-6825

Email: [sales@amcomfg.com](mailto:sales@amcomfg.com)

800 S. Industrial Parkway | P. O. Box 1107 | Yazoo City, MS 39194

## F15B Double Offset Flexwing Tandem Disc Harrows

Model	Cutting Width	Transport Width	Transport Height	No. of Disc Blades	No. of Bearings	Approx. Engine HP Required	Approx. Weight lbs.*
F15B-4622	16'6"	12'6"	9'6"	46	16	155-176	6,705
F15B-5022	18'0"	12'6"	10'3"	50	16	162-189	7,419
F15B-5422	19'6"	12'6"	11'	54	16	169-203	7,693
F15B-5822	21'0"	12'6"	11'9"	58	16	182-223	8,346
F15B-6622	24'0"	12'6"	12'6"	66	20	202-243	9,306

\*To calculate weight/blade, divide the approximate weight of the model by the number of disc blades. Specifications for all models subject to change without notice.