


AMCO

MANUFACTURING, INC.



Protect-O-Shield Bearings

Guaranteed for two full years.



BEDDING HIPPER AND TOOLBARS

Get the custom-built advantage.

We know cropping practices and farming techniques vary by region. That's why AMCO Heavy-Duty Toolbars and High-Clearance Bedding Hipper Assemblies are built to fit your individual needs. AMCO is known for heavy-duty construction and rugged durability; these tools keep you in the field for greater productivity.

Bedding Hippers

- › Perform in high-residue conditions and offer trouble-free seedbed preparation
- › Feature ¼" thick blades; sizes from 16" to 24"
- › Choose from smooth or cutout blades
- › Hippers feature 1½" square axles and Protect-O-Shield® bearings to eliminate blown seals and prevent wrap damage; backed by our exclusive two-year warranty; each housing features two bearings for added durability


Heavy-Duty Toolbars

- › Choose from three Heavy-Duty Toolbar options: hydraulic folding dual toolbar, hydraulic folding single toolbar, or rigid single toolbar
- › Folding models are designed for easy transport and storage; dual folds flat, single folds to 90 degrees
- › Dual toolbar features a locking-style hinge that engages during hydraulic folding process to keep wings from floating up during operation
- › All-welded, heavy-duty, high-clearance gang frames attach to toolbar with two ¾" heat-treated u-bolts
- › Adjustable gangs offer three different angle settings to achieve desired seedbed height and maximize performance in low or high residue
- › Gangs can be staggered for extreme residue conditions or opposed for normal operation (see image on back)
- › Rugged, tubular, welded, steel-reinforced frame with a durable, powder-coated finish

AMCO also offers its Heavy-Duty Toolbar models and Bedding Hipper Assemblies for purchase separately.



PRODUCT PERFORMANCE GUARANTEE—Repair, Replace, or Refund: AMCO Guarantees Performance. The best tillage tools deserve the best guarantee. The AMCO guarantee is simple. If, during the first 30 days, your AMCO equipment doesn't perform as promised, and if we don't make it perform in a reasonable amount of time, we'll repair it, replace it, or buy it back.



Left: The standard gauge wheel is adjustable for both on- and off-the-row placement. Features a ratcheting turnbuckle to achieve desired operating depth.



Right: Heavy-duty scrapers standard on Heavy-Duty Toolbar/Bedding Hipper combinations. Scrapers optional for Bedding Hipper Assemblies.




Left: Features sweep attachments. (Sweeps sold separately.)

Right: For smaller jobs, take a look at our 6-, 8-, and 10-row toolbars.




Above: Adjustable gangs offer three different angle settings to achieve desired seedbed height and maximize performance in low or high residue.




Two options for configuring blades on gangs

Right: Front blades work with back in staggered setup for extreme residue management.

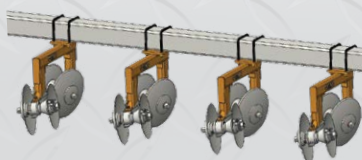

Right: Front blades opposed to back for normal conditions.

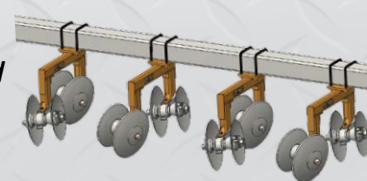

Toolbar Models

Type	Cutting Width	Transport Width	Description	Rows & Spacing
Rigid single toolbar	280"	23'4"	single toolbar, 7" x 7" x $\frac{3}{8}$ ", heavy-duty rigid, non-folding	fits row spacing of 36"-40" for 6-row or 30"-32" for 8-row
Rigid single toolbar	344"	28'8"	single toolbar, 7" x 7" x $\frac{1}{2}$ ", heavy-duty rigid, non-folding	fits row spacing of 38"-40" for 6-row or 36"-42" for 8-row
Hydraulic folding single toolbar	264"	16'	single toolbar, 7" x 7" x $\frac{3}{8}$ ", heavy-duty hydraulic, vertical folding	fits row spacing of 38"-40" for 6-row
Hydraulic folding single toolbar	346"	20'	single toolbar, 7" x 7" x $\frac{1}{2}$ ", heavy-duty hydraulic, vertical folding	fits row spacing of 36", 40", and 42" for 8-row
Hydraulic folding dual toolbar	367"	16'	dual toolbar, 7" x 7" x $\frac{3}{8}$ ", heavy-duty hydraulic, flat folding	fits row spacing of 30" for 12-row or 30"-36" for 10-row
Hydraulic folding dual toolbar	497"	22'	dual toolbar, 7" x 7" x $\frac{3}{8}$ ", heavy-duty hydraulic, flat folding	fits row spacing of 36"-40" for 10- or 12-row, 30" for 16-row

Bedding Hipper Assemblies

Blade Configuration	Blade Options
Single Blade	Cutout or smooth blades. 16", 18", 20", 22", or 24".
Double Blade	Cutout or smooth blades. 16" & 18", 18" & 20", 20" & 22", or 22" & 24".

Specifications for all models subject to change without notice.

AMCO

MANUFACTURING, INC.

800 S. Industrial Parkway
P. O. Box 1107
Yazoo City, MS 39194

Toll free: 800-748-9022
662-746-4464
Fax: 662-746-6825

Web: www.amcomfg.com
Facebook: www.facebook.com/AMCOManufacturingInc
Email: sales@amcomfg.com



**TOUGH
TILLAGE
TOOLS**